




**edge™**

GRISWOLD WATER SYSTEMS


## edge™ Reaction Chamber Specifications

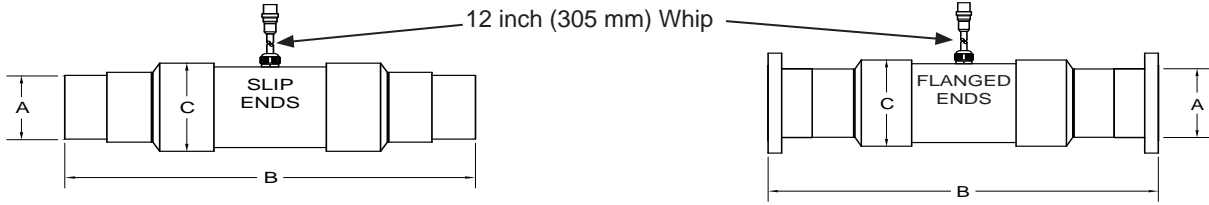

MODEL	"A" NOM. PIPE SIZE in. (mm)	"B" in. (mm)			"C" COIL COVER O.D. in. (mm)	WEIGHT LB. (KG.)		
		PVC SLIP	PVC FLANGED	FIBERGLASS FLANGED		PVC SLIP	PVC FLANGED	FIBERGLASS FLANGED
EDGE-300	3 (76)	29.50 (749)	30.00 (762)	30.00 (762)	7.1 (180)	21 (958)	25 (11.3)	24 (10.8)
EDGE-400	4 (102)	29.50 (749)	30.00 (762)	30.00 (762)	7.1 (180)	23 (10.4)	29 (13.1)	32 (14.5)
EDGE-600	6 (152)	35.25 (895)	36.00 (914)	36.00 (914)	9.3 (236)	43 (19.5)	47 (21.3)	48 (21.7)
EDGE-800	8 (203)	39.25 (997)	40.00 (1016)	40.00 (1016)	11.5 (292)	68 (30.8)	77 (34.9)	73 (33.0)
EDGE-1000	10 (254)	46.63 (1184)	48.00 (1219)	48.00 (1219)	13.3 (338)	95 (43.0)	119 (53.9)	120 (54.3)
EDGE-1200	12 (305)	46.63 (1184)	48.00 (1219)	48.00 (1219)	14.5 (368)	125 (56.6)	159 (72.0)	162 (73.3)
EDGE-1400	14 (356)	46.63 (1184)	48.00 (1219)	48.00 (1219)	16.6 (422)	151 (68.3)	205 (92.8)	202 (90.9)
EDGE-1600	16 (406)	46.63 (1184)	48.00 (1219)	48.00 (1219)	18.5 (470)	188 (85.1)	263 (119.0)	249 (112.6)

Schedule 80 PVC/CPVC 10" - 16" is by Special Order Only - Schedule 40 Fiberglass (FRP) is available in all sizes  
 Lengths are ± 0.25" (6 mm) - "C" (Coil Cover) can vary depending on fabrication procedure used  
 Reaction Chamber Meets NEMA 4 Weatherproof Specifications

## edge™ Driver (EDGE-300 - EDGE-1600)

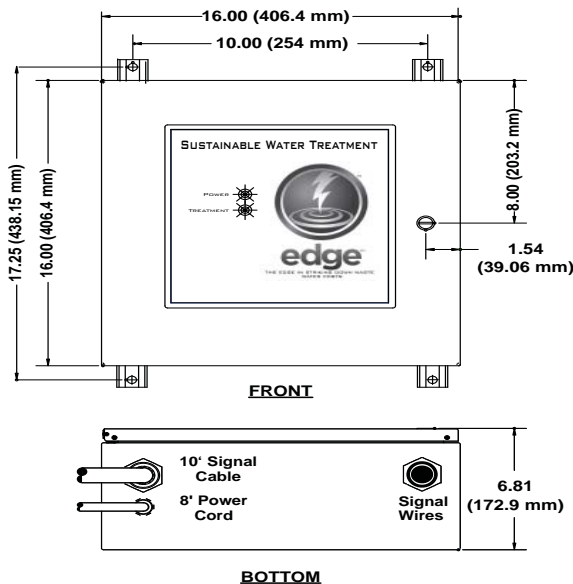

SPECIFICATIONS	
Enclosure	NEMA 4X 304 SS Standard
Weight	40 Lb (18.1 Kg)
Voltage	85-264 VAC
Hertz	47- 63 Hz
Power Consumption	<150 Watts
Power Cable	8' (2.4 Meters)
Signal Cable (Standard)	10' (3.0 Meters)
Temperature	
edge™ Driver	14°F to 120°F (-10°C to 43°C)