


SYSTEM MODEL		GLS-1000-HH	CSS-1000-HH
	Design Flow Rate, GPM	2000@40 TDH	2000@80 TDH
Item 1	Separator Model	CS-10T-FLG Carbon Steel, Powder Coated	
Item 2	Frame Construction	Carbon Steel, Powder Coated	
Item 3	Pipe Assembly	Carbon Steel, Rust Inhibitor Primer with Enamel Finish	
MOTOR 460 VAC TEFC			
Item 4	Horsepower	25 hp	50 hp
	Approximate Amps @ 460V	24 amps	65 amps
	RPM	1150	1750
PUMP			
Item 5	Pump Casing	Cast Iron	
	Pump Impeller	Bronze	
	Std. Mechanical Seal	VITON Elastomer, Silicon Carbide Seat, Carbon Rotary	
BASKET STRAINER (Optional)			
Item 6	Body Construction	Cast Iron	
	Internal Screen	1/4" Perforated 304 Stainless Steel	
	Connection Type	Class 150 Flange	
CONTROL PANEL (UL listed and labeled, manufactured to UL-508A Std.)			
Item 7	Enclosure	NEMA 4 Powder Coated, Watertight, UL listed and CSA approved	
	Electrical Components	Starter with Thermal Overload, HOA, 460/120 Transformer with Circuit Breakers, Pump "RUN" Light, Lockable Door Disconnect, Magnetic Contactor, Purge Timer, Manufactured with all UL listed & CSA approved electrical components.	
PURGE VALVE (Requires Power to Open and Power to Close. Must Close Manually if Open During a Power Outage)			
Item 8	Actuator, Motorized	120 VAC 60Hz	
	Connection Type	2" Female NPT, Ball Valve	
SPECIFICATIONS			
	Dim "A"	93-1/2"	
	Dim "B"	56-15/16"	61-3/8"
	Dim "C"	37"	
	Max. Inlet P.S.I.	100	
	Max. Operating P.S.I.	150	
	Max. Operating Temp.	120°F	
	Inlet (Class 150 Flange)	10"	10"
	Outlet (Class 150 Flange)	10"	
	Shipping Weight	3200 Lbs	

Note: Dimensions are approximate and are for reference only. Dimensions subject to change without notice. Weights are approximate.

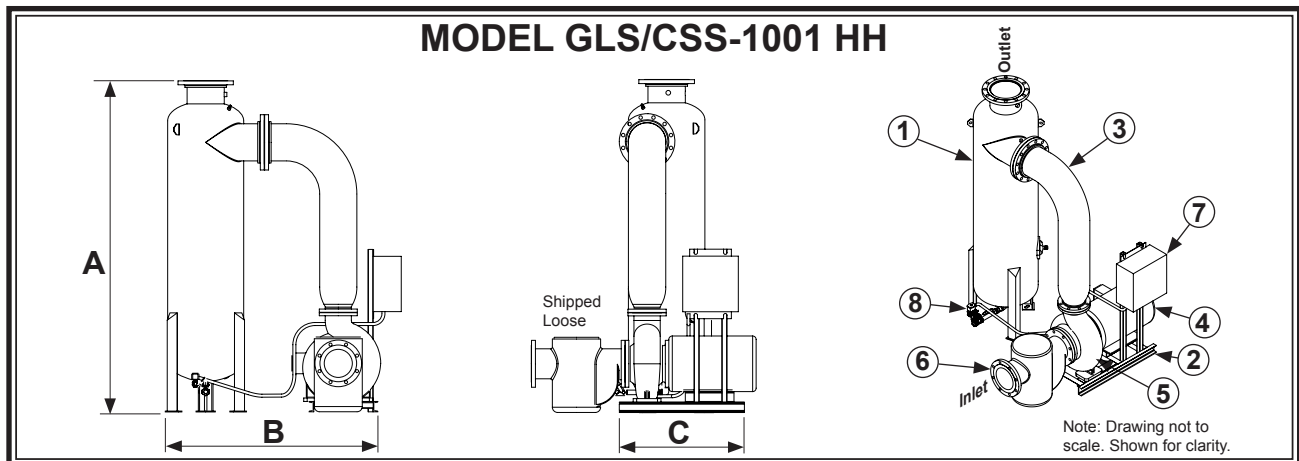

SYSTEM MODEL		GLS-1001-HH	CSS-1001-HH
	Design Flow Rate, GPM	2700@40 TDH	2700@80 TDH
Item 1	Separator Model	CS-10T-FLG Carbon Steel, Powder Coated	
Item 2	Frame Construction	Carbon Steel, Powder Coated	
Item 3	Pipe Assembly	Carbon Steel, Rust Inhibitor Primer with Enamel Finish	
MOTOR 460 VAC TEFC			
Item 4	Horsepower	40 hp	75 hp
	Approximate Amps @ 460V	24 amps	96 amps
	RPM	1150	1750
PUMP			
Item 5	Pump Casing	Cast Iron	
	Pump Impeller	Bronze	
	Std. Mechanical Seal	VITON Elastomer, Silicon Carbide Seat, Carbon Rotary	
BASKET STRAINER (Optional)			
Item 6	Body Construction	Cast Iron	
	Internal Screen	1/4" Perforated 304 Stainless Steel	
	Connection Type	Class 150 Flange	
CONTROL PANEL (UL listed and labeled, manufactured to UL-508A Std.)			
Item 7	Enclosure	NEMA 4 Powder Coated, Watertight, UL listed and CSA approved	
	Electrical Components	Starter with Thermal Overload, HOA, 460/120 Transformer with Circuit Breakers, Pump "RUN" Light, Lockable Door Disconnect, Magnetic Contactor, Purge Timer, Manufactured with all UL listed & CSA approved electrical components.	
PURGE VALVE (Requires Power to Open and Power to Close. Must Close Manually if Open During a Power Outage)			
Item 8	Actuator, Motorized	120 VAC 60Hz	
	Connection Type	2" Female NPT, Ball Valve	
SPECIFICATIONS			
	Dim "A"	93-1/2"	
	Dim "B"	80"	61-3/8"
	Dim "C"	60-1/2"	37"
	Max. Inlet P.S.I.	100	
	Max. Operating P.S.I.	150	
	Max. Operating Temp.	120°F	
	Inlet (Class 150 Flange)	12"	10"
	Outlet (Class 150 Flange)	10"	
	Shipping Weight	4200 Lbs	3200 Lbs

Note: Dimensions are approximate and are for reference only. Dimensions subject to change without notice. Weights are approximate.

Section 5, Page 15

REV. 12/10